

Job Title PORTAL FRAME WITHOUT SWAY PFWS

Part

Re
f

Client

B
y V.UMA SRI

Date 8/9/2026

Chd

File PORTAL FRAME WITHOUT SWAY PFWS.std

Date Time 08-Sep-2026 15:27

Job Information

	Engineer	Checked	Approved
Name:	V.UMA SRI		
Date:	8/9/2026		

Comments:	
Structure Type:	SPACE FRAME

Geometry

Entity Type	Count	Highest
Nodes	4	4
Analytical Members	3	3

Load Cases

Load Case Type	Count
Primary	2
Combination	1

Included in this printout are data for:

All	The Whole Structure
-----	---------------------

Load Case Table

Included in this printout are results for load cases:

L/C	Type	Name
1	Primary	LIVE LOAD
2	Primary	DEAD LOAD
3	Combination	COMBINATION LOAD CASE 3

Node Displacements

Node	L/C	X (in)	Y (in)	Z (in)	Result ant (in)	rX (rad)	rY (rad)	rZ (rad)
1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	1	0.002	-0.001	0.215	0.215	0.003	0.000	0.000
	2	0.000	-0.001	0.000	0.001	0.000	0.000	0.000
	3	0.025	-0.021	2.686	2.686	0.034	0.000	-0.002

Bentley® Software licensed to Connected User: P Kodanda RamaRao		Job No. EXNO 07	Sheet No. 2	Rev
Job Title PORTAL FRAME WITHOUT SWAY PFWS		Part		Ref
Client		By V.UMA SRI	Date 8/9/2026	Chd
File PORTAL FRAME WITHOUT SWAY PFWS.std		Date Time 08-Sep-2026 15:27		

Node Displacements Cont...

Node	L/C	X (in)	Y (in)	Z (in)	Result ant (in)	rX (rad)	rY (rad)	rZ (rad)
3	1	0.002	-0.001	0.215	0.215	0.003	0.000	0.000
	2	0.000	-0.001	0.000	0.001	0.000	0.000	0.000
	3	0.022	-0.020	2.686	2.686	0.034	0.000	0.001
4	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Nodes

Node	X (m)	Y (m)	Z (m)
1	0.000	0.000	0.000
2	0.000	4.000	0.000
3	6.000	4.000	0.000
4	6.000	0.000	0.000

Beams

Beam	Node A	Node B	Length (m)	Property	β (degrees)
1	1	2	4.000	1	0.000
2	2	3	6.000	1	0.000
3	3	4	4.000	1	0.000

Combination Load Cases

Comb.	Combination L/C Name	Primary	Primary L/C Name	Factor
3	COMBINATION LOAD CASE 3	1	LIVE LOAD	12.500
		2	DEAD LOAD	12.500

Node Displacements

Node	L/C	X (in)	Y (in)	Z (in)	Result ant (in)	rX (rad)	rY (rad)	rZ (rad)
1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Job Title **PORTAL FRAME WITHOUT SWAY PFWS**

Part

Re
f

Client

By **V.UMA SRI**

Date **8/9/2026**

Chd

File **PORTAL FRAME WITHOUT SWAY PFWS.std**

Date Time **08-Sep-2026 15:27**

Node Displacements Cont...

Node	L/C	X (in)	Y (in)	Z (in)	Result ant (in)	rX (rad)	rY (rad)	rZ (rad)
1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	1	0.002	-0.001	0.215	0.215	0.003	0.000	0.000
	2	0.000	-0.001	0.000	0.001	0.000	0.000	0.000
	3	0.025	-0.021	2.686	2.686	0.034	0.000	-0.002
3	1	0.002	-0.001	0.215	0.215	0.003	0.000	0.000
	2	0.000	-0.001	0.000	0.001	0.000	0.000	0.000
	3	0.022	-0.020	2.686	2.686	0.034	0.000	0.001
4	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Beam Displacement Summary

Type	Beam	L/C	d (m)	X (in)	Y (in)	Z (in)	Result ant (in)
Max X	3	3	1.000	0.043	-0.015	1.511	1.511
Min X	3	2	0.000	0.000	-0.001	0.000	0.001
Max Y	3	3	4.000	0.000	0.000	0.000	0.000
Min Y	3	3	0.000	0.022	-0.020	2.686	2.686
Max Z	1	3	4.000	0.025	-0.021	2.686	2.686
Min Z	1	1	0.000	0.000	0.000	0.000	0.000
Max Rst	2	3	3.000	0.024	-0.172	2.686	2.691

Beam Max Moments

Beam	Node A	Length (m)	L/C		d (m)	Max My (kip-in)	d (m)	Max Mz (kip-in)
1	1	4.000	1	Max + ve	0.000	177.015	4.000	35.287
				Max -ve	0.000	0.000	0.000	-7.492
			2	Max + ve	0.000	0.000	4.000	83.251
				Max -ve	0.000	0.000	0.000	-39.213
			3	Max + ve	0.000	2,212.68 7	4.000	1,481.72 5
				Max -ve	0.000	0.000	0.000	-583.804

Job No.	Sheet No.	Rev
EXNO 07	4	
Part	Re	f
Client	By V.UMA SRI	Date 8/9/2026
File PORTAL FRAME WITHOUT SWAY PFWS.std	Date Time 08-Sep-2026 15:27	Chd

Beam Max Moments Cont...

Beam	Node A	Length (m)	L/C		d (m)	Max My (kip-in)	d (m)	Max Mz (kip-in)
2	2	6.000	1	Max +ve	5.500	0.000	0.000	35.287
				Max -ve	0.000	0.000	1.000	-40.538
			2	Max +ve	0.000	0.000	0.000	83.251
				Max -ve	0.000	0.000	3.000	-85.664
			3	Max +ve	5.500	0.000	0.000	1,481.725
				Max -ve	0.000	0.000	2.500	-1,281.078
3	3	4.000	1	Max +ve	0.000	177.015	0.000	22.875
				Max -ve	0.000	0.000	4.000	-19.903
			2	Max +ve	0.000	0.000	0.000	83.251
				Max -ve	0.000	0.000	4.000	-39.213
			3	Max +ve	0.000	2,212.687	0.000	1,326.579
				Max -ve	0.000	0.000	4.000	-738.950

Beam Combined Stresses Summary

Beam	L/C	Length (m)	Max Comp			Max Tens		
			Stress (psi)	d (m)	Corner	Stress (psi)	d (m)	Corner
1	1	4.000	369.394	4.000	3	-339.472	4.000	1
	2	4.000	86.044	4.000	3	-65.540	4.000	1
	3	4.000	5,692.967	4.000	3	5,062.649	4.000	1
2	1	6.000	37.879	1.000	1	-35.932	1.000	3
	2	6.000	80.776	3.000	1	-75.201	3.000	3
	3	6.000	1,395.970	0.000	3	1,301.948	0.000	1
3	1	4.000	357.698	4.000	2	-341.979	0.000	1
	2	4.000	86.044	0.000	3	-65.540	0.000	1
	3	4.000	5,379.146	0.000	2	5,093.982	0.000	1

Job Title **PORTAL FRAME WITHOUT SWAY PFWS**

Part

Re
f

Client


B
y **V.UMA SRI**

Date **8/9/2026**

Chd

File **PORTAL FRAME WITHOUT SWAY PFWS.std**

Date Time **08-Sep-2026 15:27**

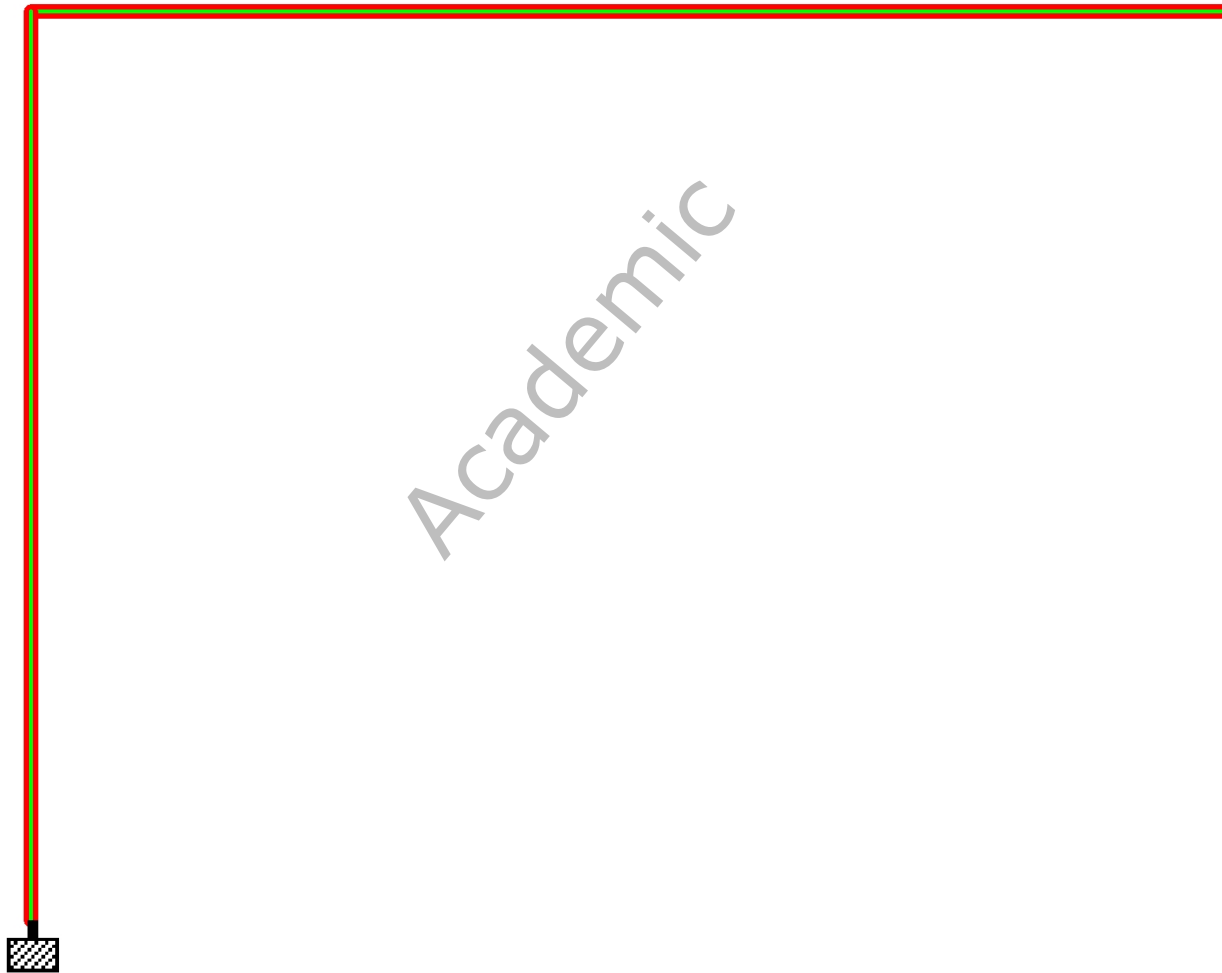

Load 2 : D

Whole Structure Displacements 39.3701in:1m 2 DEAD LOAD

Job Title **PORTAL FRAME WITHOUT SWAY PFWS**

Part

Re
f

Client


B
y **V.UMA SRI**

Date **8/9/2026**

Chd

File **PORTAL FRAME WITHOUT SWAY PFWS.std**

Date Time **08-Sep-2026 15:27**

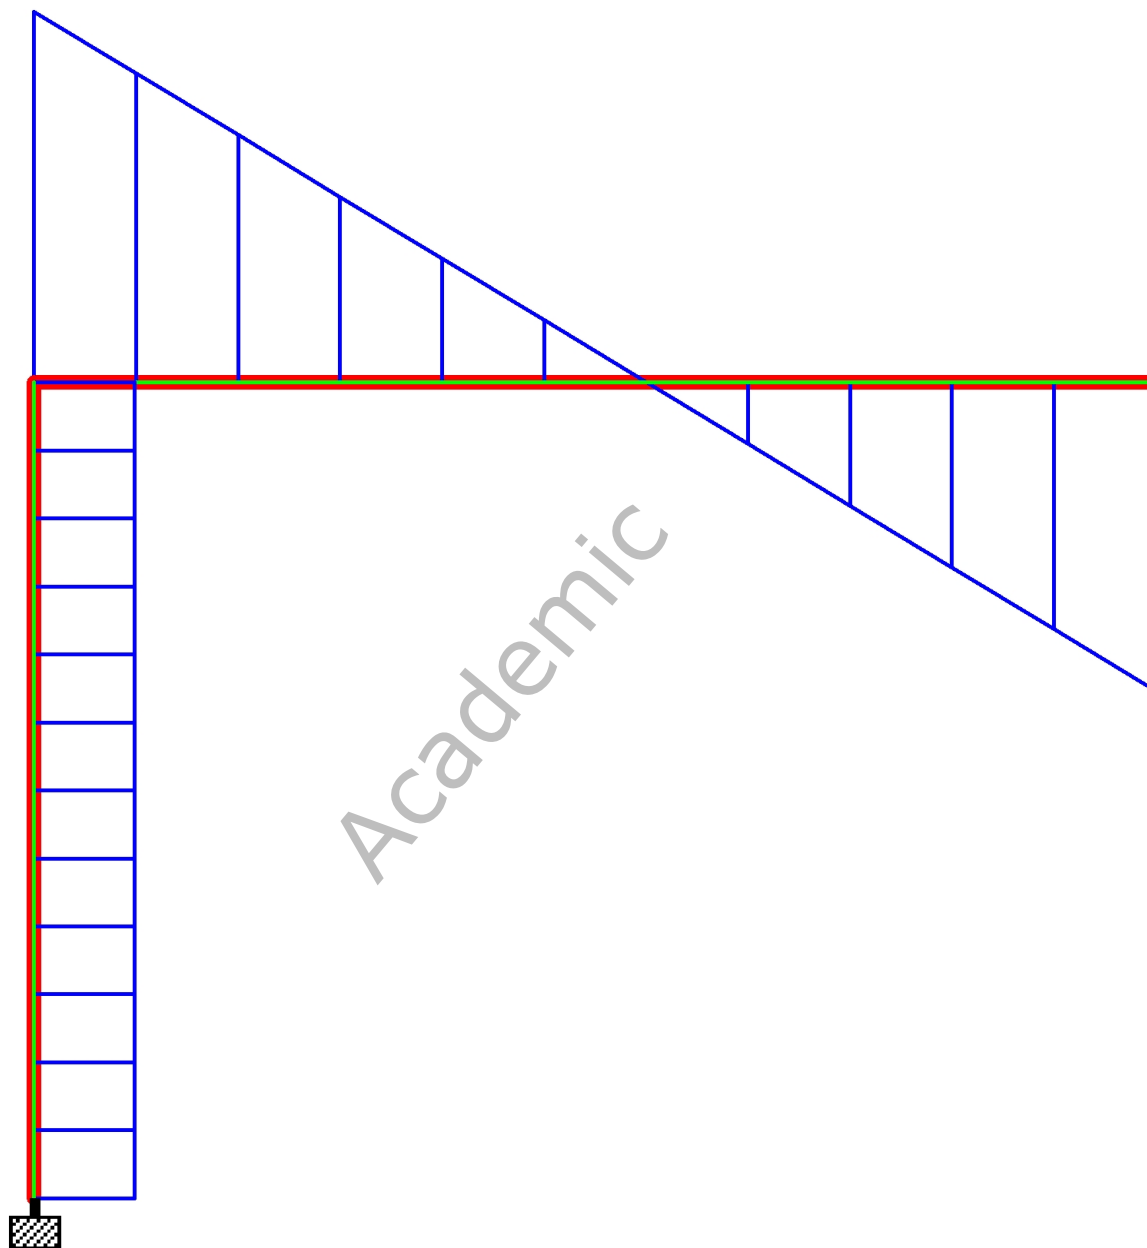

Y
Z X

Load 2 : Shear Y : D

Whole Structure Fy 7.00507kN:1m Displacements 15.748in:1m 2 DEAD LOAD

Job Title **PORTAL FRAME WITHOUT SWAY PFWS**

Part

Re
f

Client


B
y **V.UMA SRI**

Date **8/9/2026**

Chd

File **PORTAL FRAME WITHOUT SWAY PFWS.std**

Date Time **08-Sep-2026 15:27**

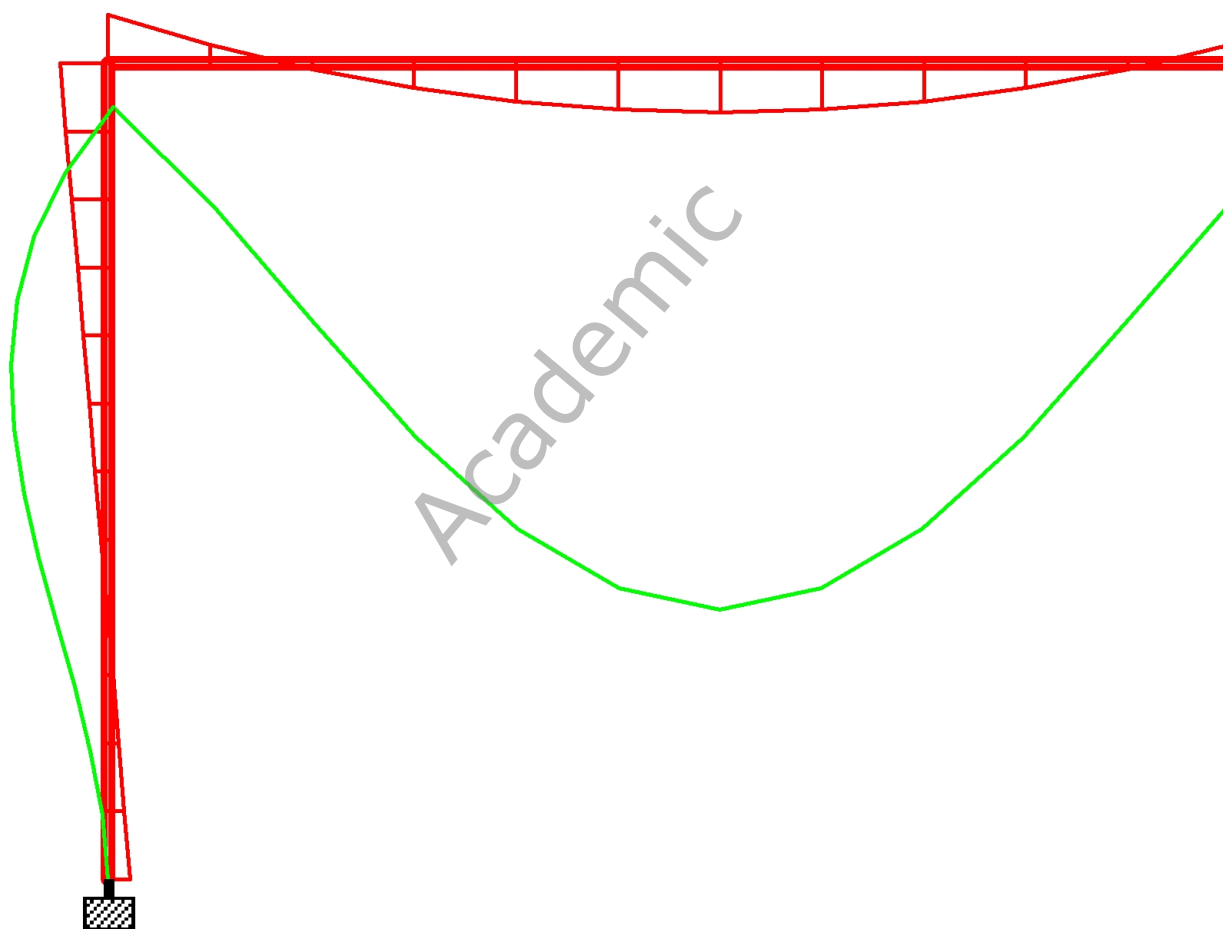

Y
Z — X

Load 2 : Bending Z : D

Whole Structure Mz 354.331kip-in:1m Displacements 0.00393701in:1m 2 DEAD LOAD

Job Title **PORTAL FRAME WITHOUT SWAY PFWS**

Part

Re
f

Client

By **V.UMA SRI**

Date **8/9/2026**

Chd

File **PORTAL FRAME WITHOUT SWAY PFWS.std**

Date Time **08-Sep-2026 15:27**

Beam End Forces

Beam	Node	L/C	Axial	Shear		Torsion	Bending	
			Fx (kN)	Fy (kN)	Fz (kN)	Mx (kip-in)	My (kip-in)	Mz (kip-in)
1	1	1	38.567	-1.208	0.000	0.000	177.015	-7.492
	2	1	-18.567	1.208	0.000	0.000	177.015	-35.287
	1	2	29.688	-3.459	0.000	0.000	0.000	-39.213
	2	2	-12.723	3.459	0.000	0.000	0.000	-83.251
	1	3	853.183	-58.343	0.000	0.000	2,212.687	-583.804
	2	3	-391.129	58.343	0.000	0.000	2,212.687	1,481.725
2	2	1	1.208	18.567	0.000	-177.015	0.000	35.287
	3	1	-1.208	1.433	0.000	-177.015	0.000	-22.875
	2	2	3.459	12.723	0.000	0.000	0.000	83.251
	3	2	-3.459	12.723	0.000	0.000	0.000	-83.251
	2	3	58.343	-391.129	0.000	2,212.687	0.000	1,481.725
	3	3	-58.343	176.952	0.000	2,212.687	0.000	-1,326.579
3	3	1	1.433	1.208	0.000	0.000	177.015	22.875
	4	1	-21.433	-1.208	0.000	0.000	-177.015	19.903
	3	2	12.723	3.459	0.000	0.000	0.000	83.251
	4	2	-29.688	-3.459	0.000	0.000	0.000	39.213
	3	3	176.952	58.343	0.000	0.000	2,212.687	1,326.579
	4	3	-639.006	-58.343	0.000	0.000	2,212.687	738.950